

LIGHTING FOR
THE UNEXPECTED

FEITUO
SINCE 1992

NINGBO FEITUO ELECTRIC APPLIANCE COMPANY LIMITED
VIET NAM FEITUO ELECTRIC APPLIANCE COMPANY LIMITED

China Address: NO.546,Qiye Road,Zhouxiang Town,Cixi City,Ningbo,China
Vietnam Address: Land Lot CN2-05, Nam Dinh Vu Non-tariff zone and Industrial Park (Zone 1),
within Dinh Vu – Cat Hai Economic Zone, Dong Hai 2 Ward, Hai An District, Hai Phong City.
Tel: +86-574-23698000 & 8012, 8027
Fax: +86-574-63310325
simon@jiming.com,lucky@jiming.com
windsor@jiming. com,tong@jiming.com
kassy@jiming.com,jma@jiming.com
<http://www.jiming. com>

- Exit Sign
- Emergency Light
- Led Emergency Driver



Factory Covers Area:
20,000 Square Meters

Facility and Production Area:
50,000 Square Meters



Emergency Light | Exit Sign | Led Emergency Driver
www.jiming.com



Factory Covers Area:
23,000 Square Meters

Facility and Production Area:
15,000 Square Meters



Emergency Light | Exit Sign | Led Emergency Driver
www.jiming.com



About us

Ningbo Feituo Electric Appliance Co., LTD was founded in 1990 as an all-around enterprise engaged in the development, production, sale and service of lighting and electrical products for markets worldwide. With a staff of over 600 people at our facility, the production, warehouse and office areas cover over 70,000 square meters and incorporates state of the art technologies in product design and manufacturing processes.

Feituo's main product lines are LED Emergency and Security lighting, LED Exit sign, Emergency battery backup for LED fixtures, Explosion Proof Emergency lights, Rechargeable lamps and etc. The combined technologies of LED light sources, rechargeable battery expertise and comprehensive plastics molding capabilities makes us the premier supplier to a number of international companies.

With a quality tradition that dates back to 1997, Feituo passed ISO9001 certification in 1998 and has maintained its ISO Certification as a commitment to international practice. The corporate strategy is "vitalizing Feituo through science and technology while delivering highest quality to the markets we serve". We test 100% of our products, to SACI standards, and have met the rigorous safety requirements of UL, FCC, Title 20(USA), CE (Europe) and GS (Germany). Feituo sells to over eighty countries in the Americas, Europe, Africa, Asia and the Middle East. The company is located in the city of Ningbo, one of the largest port areas in China. This provides easy access to international trade routes and convenient, cost effective transportation options.

The people of Feituo have high aspirations: to produce quality products, meet customer's demands and make a better life for all! With this in mind, the people of Feituo will work much harder and constantly pursue a bright future!

Any business inquiry and cooperation suggestion is welcomed and highly appreciated.

Emergency Light | Exit Sign | Led Emergency Driver


www.jiming.com



Bi-Color Red/Green LED's

Features:

- Injection-molded, flame-retardant, high-impact, thermoplastic housing.
- Innovative, easy installation in minutes.
- Red lettering can be switched to Green.
- SALIDA faceplate available.
- Single or double face(Universal)
- Universal J-box mounting pattern.
- 120/277VAC Dual Voltage operation.
- 2*8 pcs ultra bright 2835 SMT LED lamp heads for emergency mode.
- Built-in 3.6V 1200mAh NI-MH battery for minimum 90 minutes emergency operation.
- Built-in 3.6V 2400 mAh NI-MH battery for minimum 90 minutes emergency operation.(JLEC2BCWRC, Remote capability up to 2W)
- UL and cULus Listed.
- Three years warranty.
- **With self-diagnostic functions listed, For Monthly self-diagnostic and Annually self-diagnostic.**
- 120V-277VAC Universal voltage operation.
- Built-in 3.6V1200mAh Ni-MH Battery for minimum 90 minutes emergency operation.(ZC-JLEC2BCW)
- Built-in 3.6V2400mAh Ni-MH Battery for minimum 90 minutes emergency operation.(ZC-JLEU2BCWRC Remote capability up to 2W)

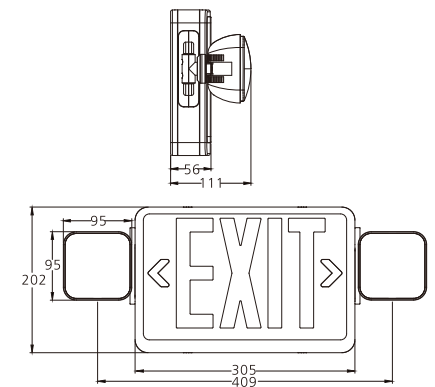

Ordering information

Model No.	Packing information	Options
JLEC2BCW	50x44x38.5cm/6pcs 12.6/11.6kgs	Housing Color: White/Black
JLEC2BCWRC	50x44x38.5cm/6pcs 13.0/12.0kgs	2W Remote Capability
JLEC2BCW-SA	50x44x38.5cm/6pcs 12.6/11.6kgs	Lens: RED/GREEN

UL US RoHS COMPLIANT CEC
DOE FC


New



Bi-Color Red/Green LED's

Features:

- Injection-molded, flame-retardant, high-impact, thermoplastic housing.
- Innovative, easy installation in minutes.
- Red lettering can be switched to Green.
- SALIDA faceplate available.
- Single or double face(Universal)
- Universal J-box mounting pattern.
- 120-277VAC Universal Voltage operation.
- 2x1W 2835 SMT LED lamp heads for emergency mode.
- Built-in 3.6V 1000mAh NI-MH battery for minimum 90 minutes emergency operation.
- Built-in 3.6V 2000 mAh NI-MH battery for minimum 90 minutes emergency operation.(JLECE2BCWRC, Remote capability up to 2W)
- UL and cULus Listed.
- Three years warranty.
- **With self-diagnostic functions listed,For Monthly self-diagnostic and Annually self-diagnostic.**
- 120V-277VAC Universal voltage operation.
- Built-in 3.6V1000mAh Ni-MH Battery for minimum 90 minutes emergency operation.(ZC-JLECE2BCW)
- Built-in 3.6V2000mAh Ni-MH Battery for minimum 90 minutes emergency operation.(ZC-JLECE2BCWRC Remote capability up to 2W)

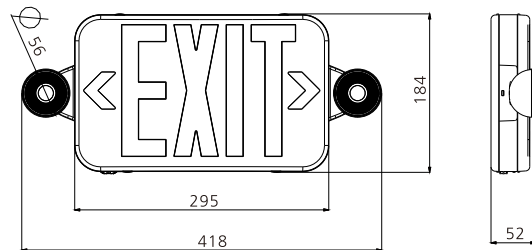

Ordering information

Model No.	Packing information	Options
JLECE2BCW	45x41x23cm/6pcs 6.2/5.2kgs	Housing Color: White/Black
JLECE2BCWRC	45x41x23cm/6pcs 8/7kgs	2W Remote Capability
JLECE2BCW-S	45x41x23cm/6pcs 6.2/5.2kgs	Lens: RED/GREEN

UL US RoHS COMPLIANT CEC
DOE FC


New



Bi-Color Red/Green LED's

Features:

- Injection-molded, flame-retardant, high-impact, thermoplastic housing.
- Innovative, easy installation in minutes.
- Red lettering can be switched to Green.
- SALIDA faceplate available.
- Single or double face(Universal)
- Universal J-box mounting pattern.
- 120/277VAC Dual Voltage operation.
- Ultra bright RED or GREEN LEDs.
- Built-in 1.2V 1000mAh NI-MH battery for minimum 90 minutes emergency operation.
- UL and cULus Listed.
- Three years warranty.
- **With self-diagnostic functions listed,For Monthly self-diagnostic and Annually self-diagnostic.**
- 120V-277VAC Universal voltage operation
- Built-in 3.6V500mAh Ni-MH Battery for minimum 90 minutes emergency operation.(ZC-EZCXTEU2BCWEM)

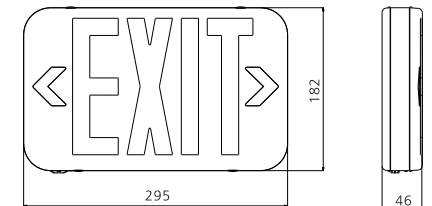

Ordering information


Model No.	Packing information	Options
EZCXTEU2BCWEM	39x32x22.5cm/6pcs 6.4/5.4kgs	Housing Color: White/Black
EZCXTEU2BCW	39x32x22.5cm/6pcs 5.8/4.8kgs	Lens: RED/GREEN

cUL^{us} RoHS COMPLIANT CEC
DOE FC



Features:

- Injection-molded, flame-retardant, high-impact, thermoplastic housing.
- Self-test funtions: Monthly test, Year test
- Innovative, easy installation in minutes
- Suitable for wall mount applications
- Universal J-box mounting pattern.
- 120V-277VAC Universal voltage operation.
- 2pcs 1W ultra bright 3030 SMT LED lamp heads for emergency mode..
- Built-in 3.6V 1000mAh Ni-MH battery for minimum 90 minutes emergency operation.(JLEU8-SD With self-test functions)
- Built-in 3.6V 2000mAh Ni-MH battery for minimum 90 minutes emergency operation.(JLEU8-RC, JLEU8-SD-RC, Remotecapability up to 3W).
- Maximum 24 hours for full recharge time.
- Test switch and charge indicator.
- UL and cULus listed.
- 0" to 40 C indoor damp location listed.
- Three years warranty.

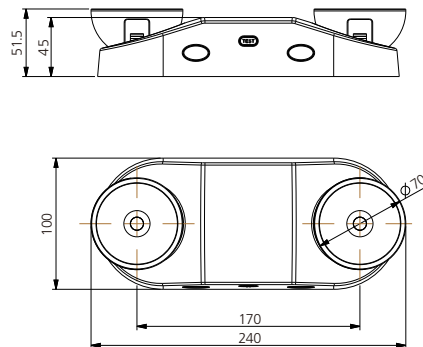

Ordering information


Model No.	Packing information	Options
JLEU8	36X25X22.5cm/12pcs 5/4kgs	Housing Color: White/Black
JLEU8RC	36X25X22.5cm/12pcs 7/6kgs	RC remote capability
JLEU8-SD	36X25X22.5CM/12pcs 5/4kgs	SD self-test funtions
JLEU8-SD-RC	36X25X22.5CM/12pcs 7/6kgs	

cUL^{us} RoHS COMPLIANT CEC
DOE FC



Features:

- Injection-molded, flame-retardant, high-impact, thermoplastic housing .
- Self-test funtions: Monthly test, Year test
- Innovative, easy installation in minutes
- Suitable for wall mount applications
- Universal J-box mounting pattern.
- 120V-277VAC Universal voltage operation.
- 2pcs 1W ultra bright 3030 SMT LED lamp heads for emergency mode.
- Built-in 3.6V 1000mAh Ni-MH battery for minimum 90 minutes emergency operation.(JLEU16-SD With self-test functions)
- Built-in 3.6V 2000mAh Ni-MH battery for minimum 90 minutes emergency operation.(JLEU16-RC, JLEU16-SD-RC, Remotecapability up to 3W).
- Maximum 24 hours for full recharge time.
- Test switch and charge indicator.
- UL and cULus listed.
- 0" to 40 C indoor damp location listed.
- Three years warranty.

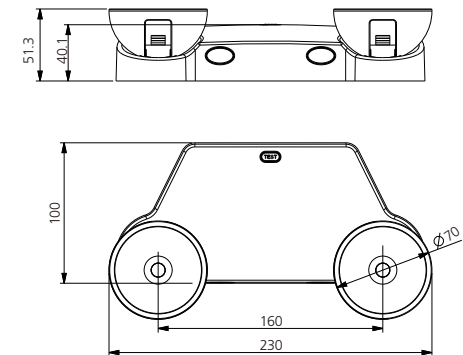

Ordering information

Model No.	Packing information	Options
JLEU16	36X25X21cm/12pcs 5/4kgs	Housing Color: White/Black
JLEU16RC	36X25X21cm/12pcs 7/6kgs	RC remote capability
JLEU16-SD	36X25X21cm/12pcs 5/4kgs	SD self-test funtions
JLEU16-SD-RC	36X25X21cm/12pcs 7/6kgs	




New

UL US RoHS COMPLIANT CEC
DOE FC

Features:

- Injection-molded, flame-retardant, high-impact, thermoplastic housing.
- Self-test functions: Monthly test, Year test
- Innovative, easy installation in minutes
- Suitable for wall mount applications
- Universal J-box mounting pattern.
- 120V-277VAC Universal voltage operation.
- 2pcs 1W ultra bright 3030 SMT LED lamp heads for emergency mode.
- Built-in 3.6V 1000mAh Ni-MH battery for minimum 90 minutes emergency operation. (JLEU18-SD With self-test functions)
- Built-in 3.6V 2000mAh Ni-MH battery for minimum 90 minutes emergency operation. (JLEU18-RC, JLEU18-SD-RC, Remote capability up to 3W).
- Maximum 24 hours for full recharge time.
- Test switch and charge indicator.
- UL and cULus listed.
- 0° to 40° C indoor damp location listed.
- Three years warranty.

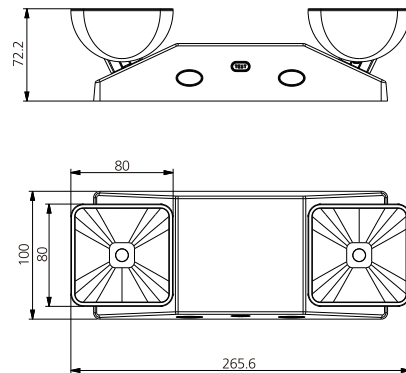

Ordering information

Model No.	Packing information	Options
JLEU18	44X28.5X25cm/12pcs 5/4kgs	Housing Color: White/Black
JLEU18RC	44X28.5X25cm/12pcs 7/6kgs	RC remote capability
JLEU18-SD	44X28.5X25cm/12pcs 5/4kgs	SD self-test functions
JLEU18-SD-RC	44X28.5X25cm/12pcs 7/6kgs	




New

UL US RoHS COMPLIANT CEC
DOE FC

Features:

- Injection-molded, flame-retardant, high-impact, thermoplastic housing.
- Innovative, easy installation in minutes.
- Suitable for wall mount applications.
- Universal J-box mounting pattern.
- 120-277VAC Dual voltage operation.
- 2X12pcs ultra bright 2835 SMT LED lamp heads for emergency mode.
- Built-in 3.6V1000mAh Nickel cadmium battery for minimum 90 minutes emergency operation.
- Maximum 24 hours for full recharge time.
- Test switch and charge indicator.
- UL and cULus listed.
- 0° to 40° C indoor damp location listed.
- Three years warranty.

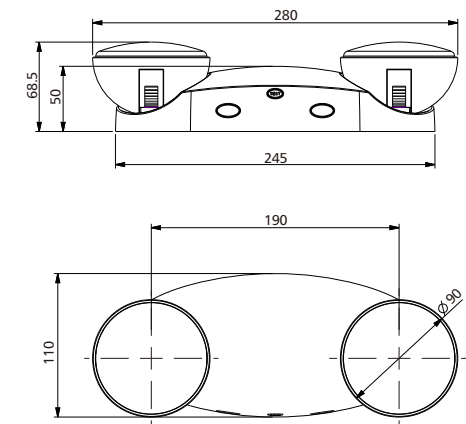


Ordering information

Model No.	Packing information	Options
JLEU13	30x25x26cm/6pcs 3.4/2.6kgs	Housing Color: White/Black



Features:

- Injection-molded, flame-retardant, high-impact, thermoplastic housing.
- Innovative, easy installation in minutes.
- Suitable for wall mount applications.
- Universal J-box mounting pattern.
- 120V/277VAC Dual voltage operation.
- 2X12pcs ultra bright 2835 SMT LED lamp heads for emergency mode. (JLEU9)
- Low profile 2X8pcs ultra bright 2835 SMT LED lamp heads for emergency mode(JLEU9L)
- Built-in 3.6V600mAh Nickel cadmium battery for minimum 90 minutes emergency operation. (JLEU9L)
- Built-in 3.6V1000mAh Nickel cadmium battery for minimum 90 minutes emergency operation. (JLEU9)
- Built-in 3.6V2000mAh Nickel cadmium battery for minimum 90 minutes emergency operation. (JLEU9RC,Remote capability up to 2W)
- UL and cULus listed.
- Three years warranty.
- **With self-diagnostic functions listed,For Monthly self-diagnostic and Annually self-diagnostic.**
- 120V-277VAC Universal voltage operation.
- Built-in 3.6V1000mAh Ni-MH Battery for minimum 90 minutes emergency operation. (ZC-JLEU9)
- Built-in 3.6V2000mAh Ni-MH Battery for minimum 90 minutes emergency operation.(ZC-JLEU9RC Remote capabilith up to 2W).

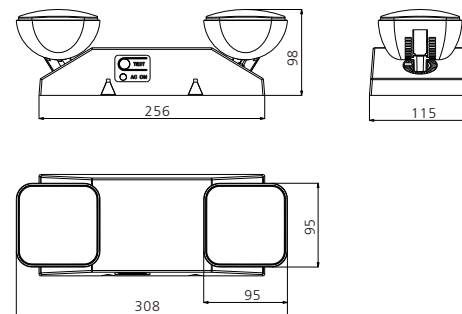


Ordering information

Model No.	Packing information	Options
JLEU9L	41x33x23.5cm/6pcs 4.0/2.7kgs	Housing Color: White/Black
JLEU9	41x33x23.5cm/6pcs 4.3/3.0kgs	Remote capability
JLEU9RC	41x33x23.5cm/6pcs 5.0/4.0kgs	



Features:

- Injection-molded, flame-retardant, high-impact, thermoplastic housing.
- Innovative, easy installation in minutes.
- Suitable for wall mount applications.
- Universal J-box mounting pattern.
- 120V/277VAC Dual voltage operation.
- 2X12pcs ultra bright 2835 SMT LED lamp heads for emergency mode.
- Built-in 3.6V1000mAh Nickel cadmium battery for minimum 90 minutes emergency operation. (JLEU5)
- Built-in 3.6V2000mAh Nickel cadmium battery for minimum 90minutes emergency operation. (JEU5RC,Remote capability up to 2W)
- UL and cULus listed.
- Three years warranty.
- **With self-diagnostic functions listed,For Monthly self-diagnostic and Annually self-diagnostic.**
- 120V-277VAC Universal voltage operation.
- Built-in 3.6V1000mAh Ni-MH Battery for minimum 90 minutes emergency operation.(ZC-JLEU5).
- Built-in 3.6V2000mAh Ni-MH Battery for minimum 90 minutes emergency operation.(ZC-JLEU5RC Remote capabilith up to 2W).

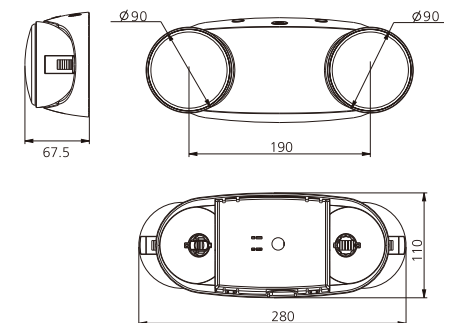


Ordering information

Model No.	Packing information	Options
JLEU5	30x24x24.5cm/6pcs 3.2/2.2kg	Housing Color: White/Black
JLEU5RC	30x24x24.5cm/6pcs 3.8/2.8kg	Remote capability



Features:

- Injection-molded, flame-retardant, high-impact, thermoplastic housing.
- Innovative, easy installation in minutes.
- Suitable for wall mount applications.
- Universal J-box mounting pattern.
- 120V/277VAC Dual voltage operation.
- 2X12pcs ultra bright 2835 SMT LED lamp heads for emergency mode.
- Built-in 3.6V1000mAh Nickel cadmium battery for minimum 90 minutes emergency operation. (JLEU3)
- Built-in 3.6V2000mAh Nickel cadmium battery for minimum 90 minutes emergency operation. (JLEU3RC, Remote capability up to 2W)
- Maximum 24 hours for full recharge time.
- Test switch and charge indicator.
- UL and cULus listed.
- 0° to 40° C indoor damp location listed.
- Three years warranty.




Ordering information

Model No.	Packing information	Options
JLEU3	37x21x38cm/6pcs 5/4kgs	Housing Color: White/Black
JLEU3RC	37x21x38cm/6pcs 5.5/4.5kgs	Remote capability



Features:

- Injection-molded, flame-retardant, high-impact, thermoplastic housing.
- Innovative, easy installation in minutes.
- Suitable for wall mount applications.
- Universal J-box mounting pattern.
- 120V-277VAC Universal voltage operation.
- 2pcs 1W ultra bright LED lamp heads for emergency mode.
- Luminous Flux: more than 200 LM.
- Built-in 3.6V1000mAh Ni-MH battery for minimum 90 minutes emergency operation.
- Maximum 24 hours for full recharge time.
- Test switch and charge indicator.
- UL and cULus listed.
- 0° to 40° C indoor damp location listed.
- Three years warranty.

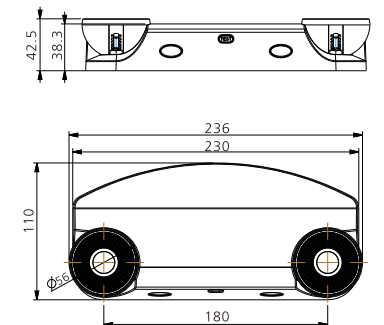


Ordering information

Model No.	Packing information	Options
JLEU15	35.5x24.5x21cm/12pcs 5/4kgs	Housing Color: White/Black



Features:

- Injection-molded, flame-retardant, high-impact, thermoplastic housing.
- Innovative, easy installation in minutes.
- Suitable for wall mount applications.
- Universal J-box mounting pattern.
- 120V-277VAC Universal voltage operation.
- 2X 4pcs 2835 LED lamp heads for emergency mode.
- Luminous Flux: more than 240 LM.
- Built-in 3.6V1000mAh Nickel cadmium battery for minimum 90 minutes emergency operation.
- Maximum 24 hours for full recharge time.
- Test switch and charge indicator.
- UL and cULus listed.
- 0° to 40° C indoor damp location listed.
- Three years warranty.

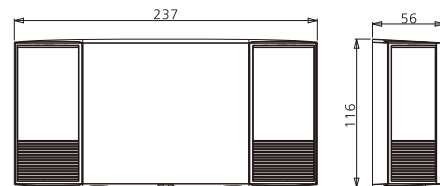


Ordering information

Model No.	Packing information	Options
JLEU12	40x27x15.5cm/6pcs 4.5/3.5kgs	Housing Color: White/Black



Features:

- Injection-molded, flame-retardant, high-impact, thermoplastic housing.
- Innovative, easy installation in minutes.
- Suitable for wall mount applications.
- Universal J-box mounting pattern.
- 120V/277VAC Dual voltage operation.
- 2pcs 1W ultra bright LED lamp heads for emergency mode.
- Luminous Flux: more than 200 LM.
- Built-in 3.6V1000mAh Nickel cadmium battery for minimum 90 minutes emergency operation.
- Maximum 24 hours for full recharge time.
- Test switch and charge indicator.
- UL and cULus listed.
- 0° to 40° C indoor damp location listed.
- Three years warranty.

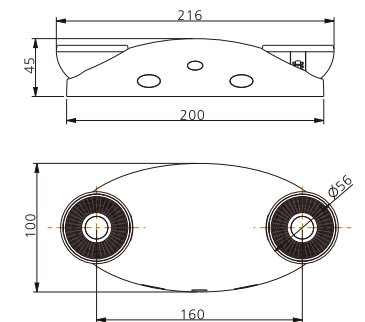


Ordering information

Model No.	Packing information	Options
JLEU10	36x24.5x26cm/12pcs 4.62/3.45kgs	Housing Color: White/Black



Features:

- Injection-molded, flame-retardant, high-impact, thermoplastic housing.
- Innovative, easy installation in minutes
- Suitable for wall mount applications
- Universal J-box mounting pattern
- 120V -277VAC Universal voltage operation
- 2X3pcs Super bright LED lamp heads for emergency mode, provide more than 650Lm output.
- Built-in 6V4AH Lead Acid battery for minimum 90 minutes emergency operation.
- Maximum 24 hours for full recharge time
- Test switch and charge indicator
- UL and cULus listed
- 0° to 40°C indoor damp location listed
- Three years warranty.




Ordering information

Model No.	Packing information	Options
JLEU6	35x29x26cm/6pcs 9.4/8.2kgs	Housing Color: White/Black



Features:

- Injection-molded, flame-retardant, high-impact, thermoplastic housing.
- Innovative, easy installation in minutes.
- Suitable for wall mount applications.
- Universal J-box mounting pattern.
- 120V/277VAC Dual voltage operation.
- 2X12pcs ultra bright LED lamps heads for emergency mode.
- Built-in 3.6V1000mAh Nickel cadmium battery for minimum 90 minutes emergency operation. (JLEU1)
- Built-in 3.6V2000mAh Nickel cadmium battery for minimum 90 minutes emergency operation. (JLEU1RC, Remote capability up to 2W)
- Maximum 24 hours for full recharge time.
- Test switch and charge indicator.
- UL and cULus listed.
- 0° to 40° C indoor damp location listed.
- Three years warranty.

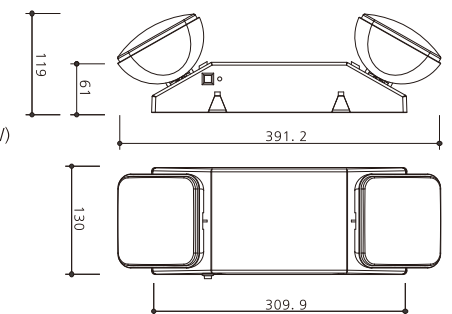

Ordering information

Model No.	Packing information	Options
JLEU1	43x32.5x38cm/6pcs 8/7kgs	Housing Color: White/Black
JLEU1RC	43x32.5x38cm/6pcs 9/8kgs	Remote capability



UL

US

RoHS

COMPLIANT


CEC

DOE

FC


Features:

- Injection-molded, flame-retardant, high-impact, thermoplastic housing.
- Innovative, easy installation in minutes.
- Suitable for wall mount applications.
- Universal J-box mounting pattern.
- 120V/277VAC Dual voltage operation.
- 2X12pcs ultra bright 2835 SMT LED lamp heads for emergency mode.
- Built-in 3.6V1000mAh Nickel cadmium battery for minimum 90 minutes emergency operation.
- Maximum 24 hours for full recharge time.
- Test switch and charge indicator.
- UL and cULus listed.
- 0° to 40° C indoor damp location listed.
- Three years warranty.

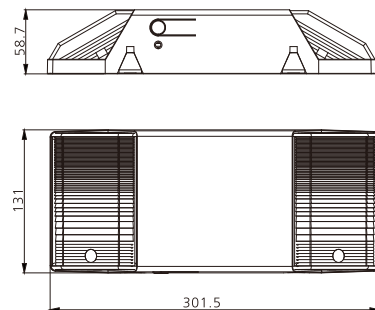

Ordering information

Model No.	Packing information	Options
JLEU4	32x30x28cm/6pcs 4. 6/3. 6kgs	Housing Color: White/Black

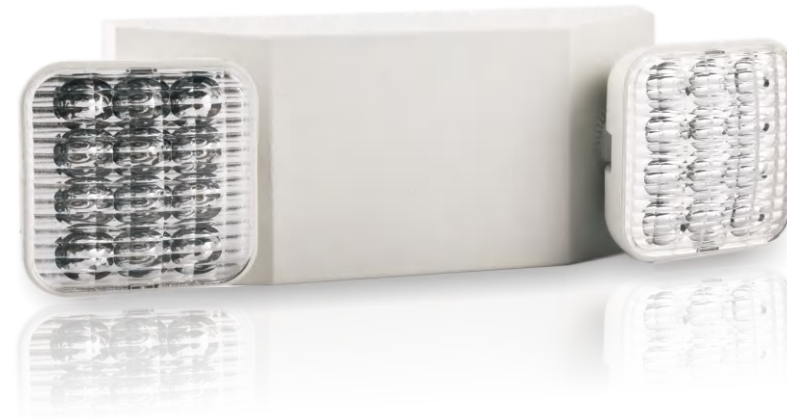

UL

US

RoHS

COMPLIANT


CEC

DOE

FC

Features:

- Injection-molded, flame-retardant, high-impact, thermoplastic housing.
- Innovative, easy installation in minutes
- Suitable for wall mount applications
- Universal J-box mounting pattern
- 120V/277VAC Dual voltage operation
- 2X12pcs ultra bright $\Phi 5$ LED lamp heads for emergency mode(JLEU9C)
- Low profile 2X8pcs ultra bright $\Phi 5$ LED lamp heads for emergency mode(JLEU9CL)
- Built-in 3.6V600mAh Nickel cadmium battery for minimum 90 minutes emergency operation.(JLEU9CL)
- Built-in 3.6V1000mAh Nickel cadmium battery for minimum 90 minutes emergency operation.(JLEU9C)
- Built-in 3.6V2000mAh Nickel cadmium battery for minimum 90 minutes emergency operation.(JLEU9CRC,Remote capability up to 2.2W)
- Maximum 24 hours for full recharge time
- Test switch and charge indicator
- UL and cULus listed
- 0° to 40°C indoor damp location listed
- Three years warranty.

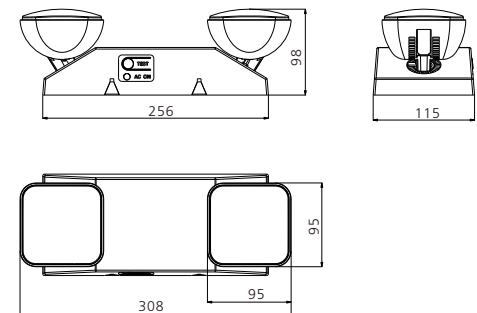

Ordering information

Model No.	Packing information	Options
JLEU9CL	40.7x32.5x23cm/6pcs 5/4kgs	Housing Color: White/Black
JLEU9C	40.7x32.5x23cm/6pcs 5.2/4.2kgs	Remote capability
JLEU9CRC	40.7x32.5x23cm/6pcs 5.5/4.5kgs	





 DOE 



Features:

- Injection-molded, flame-retardant, high-impact, thermoplastic housing.
- Innovative, easy installation in minutes.
- Letters 6" height with 3/4" stroke. Optional RED or GREEN letters.
- SALIDA faceplate available.
- Single or double face(Universal)
- Universal J-box mounting pattern.
- 120V/277VAC Dual voltage operation.
- Ultra bright RED or GREEN LEDs.
- Built-in 1.2V1000mAh Nickel cadmium battery for minimum 90 minutes emergency operation.
- Maximum 24 hours for full recharge time.
- Test switch and charge indicator.
- UL and cULus listed.
- 0° to 40° C indoor damp location listed.
- Three years warranty.



Ordering information

Model No.	Packing information	Options
JEE2RWE	40x33x23cm/6pcs 6.4/5.4kgs	Housing Color:White/Black
JEE2GWE	40x33x23cm/6pcs 6.4/5.4kgs	Lens: RED/GREEN
JEE2RW AC ONLY	40x33x23cm/6pcs 5.8/4.8kgs	Letter: EXIT/SALIDA
JEE2GW AC ONLY	40x33x23cm/6pcs 5.8/4.8kgs	
JEE2GW-SALIDA	40x33x23cm/6pcs 5.8/4.8kgs	





 DOE 



Features:

- Injection-molded, flame-retardant, high-impact, thermoplastic housing.
- Innovative, easy installation in minutes
- Letters 6" height with 3/4" stroke. Optional RED or GREEN letters.
- SALIDA faceplate available.
- Single or double face(Universal).
- Universal J-box mounting pattern
- 120V/277VAC Dual voltage operation
- Ultra bright RED or GREEN LEDs
- Built-in 1.2V900mAh Nickel cadmium battery for minimum 90 minutes emergency operation.
- Maximum 24 hours for full recharge time
- Test switch and charge indicator
- UL and cULus listed
- 0° to 40°C indoor damp location listed
- Three years warranty.

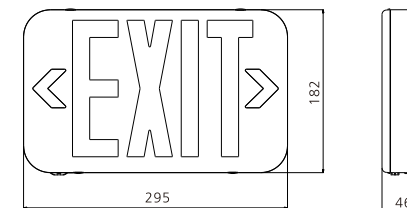

Ordering information


Model No.	Packing information	Options
EZCXTEU2RWEM	39x32x22.5cm/6pcs 6.4/5.4kgs	Housing Color: White/Black
EZCXTEU2GWEM	39x32x22.5cm/6pcs 6.4/5.4kgs	Lens: RED/GREEN
EZCXTEU2RW	39x32x22.5cm/6pcs 5.8/4.8kgs	AC ONLY
EZCXTEU2GW	39x32x22.5cm/6pcs 5.8/4.8kgs	AC ONLY



UL US RoHS COMPLIANT CEC
DOE FC

Features:

- Injection-molded, flame-retardant, high-impact, thermoplastic housing.
- Innovative, easy installation in minutes.
- Ultra thin Exit sign and Combo.
- Letters 6" height with 3/4 stroke
- Single or double face(Universal)
- Universal J-box mounting pattern.
- 120V-277VAC Universal voltage operation
- Ultra bright RED or GREEN LEDs.
- Built-in 1.2V1000mAh Ni-MH battery for minimum 90 minutes emergency operation.(Model: JLEED2RWEM/JLEED2GWEM)
- Built-in 3.6V1000mAh Ni-MH battery for minimum 90 minutes emergency operation.(Model: JLECD2RW/JLECD2GW)
- Maximum 24 hours for full recharge time.
- Test switch and charge indicator.
- UL and cULUs listed.
- 0° to 40° indoor damp location listed.
- Three years warranty.

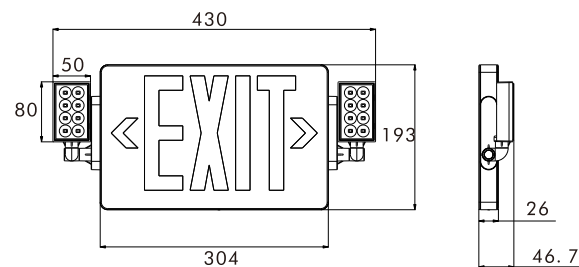

Ordering information


Model No.	Packing information	Options
JLECD2RW	47x28x23cm/4pcs 4.7/3.7kgs	Housing Color: White/Black
JLECD2GW	47x28x23cm/4pcs 4.7/3.7kgs	Lens: RED/GREEN
JLEED2RWEM	33x40x22cm/12pcs 11.5/10.5kgs	Letter: EXIT/SALIDA
JLEED2GWEM	33x40x22cm/12pcs 11.5/10.5kgs	
JLEED2RW	33x40x22cm/12pcs 11.3/10.3kgs	AC ONLY
JLEED2GW	33x40x22cm/12pcs 11.3/10.3kgs	AC ONLY

UL US RoHS COMPLIANT CEC
DOE FC



Features:

- Injection-molded, flame-retardant, high-impact, thermoplastic housing.
- Innovative, easy installation in minutes.
- Letters 6" height with 3/4" stroke. Optional RED or GREEN letters.
- SALIDA faceplate available.
- Single or double face(Universal)
- Universal J-box mounting pattern.
- 120V/277VAC Dual voltage operation.
- 2X12pcs ultra bright 2835 SMT LED lamp heads for emergency mode.
- Built-in 9.6V600mAh Nickel cadmium battery for minimum 90 minutes emergency operation.
- Built-in 9.6V1000mAh Nickel cadmium battery for minimum 90 minutes emergency operation. (JLEC2RWRC, Remote capability up to 2W)
- Maximum 24 hours for full recharge time.
- Test switch and charge indicator.
- UL and cULUs listed.
- 0° to 40° C indoor damp location listed.
- Three years warranty.

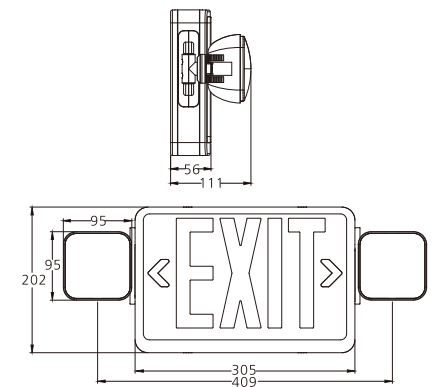

Ordering information

Model No.	Packing information	Options
JLEC2RW	50x44x38.5cm/6pcs 12.6/11.6kgs	Housing Color: White/Black
JLEC2GW	50x44x38.5cm/6pcs 12.6/11.6kgs	Remote capability
JLEC2RWRC	50x44x38.5cm/6pcs 13.0/12.0kgs	Lens: RED/GREEN
JLEC2GW-SA	50x44x38.5cm/6pcs 12.6/11.6kgs	




UL US RoHS COMPLIANT CEC
DOE FC



Features:

- Injection-molded, flame-retardant, high-impact, thermoplastic housing.
- Innovative, easy installation in minutes.
- Letters 6"height with 3/4"stroke.Optional RED or GREEN letters.
- SALIDA faceplate available.
- Single or double face(Universal)
- Universal J-box mounting pattern.
- 120V/277VAC Dual voltage operation.
- 2X1W SMT LED lamp heads for emergency mode.
- Built-in 3.6V1000mAh Nickel cadmium battery for minimum 90 minutes emergency operation.
- Built-in 3.6V2000mAh Nickel cadmium battery for minimum 90 minutes emergency operation. (JLECB2RWRC)
- Maximum 24 hours for full recharge time.
- Test switch and charge indicator.
- UL and cULus listed.
- 0° to 40° C indoor damp location listed.
- Three years warranty.

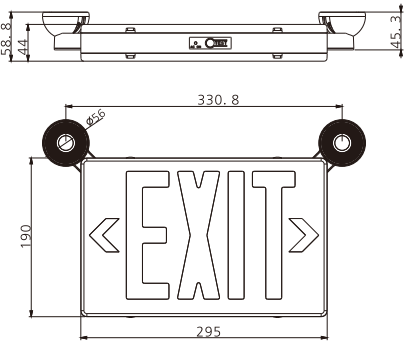

Ordering information


Model No.	Packing information	Options
JLECB2RW	40x33x23cm/6pcs 8.6/7.6kgs	Housing Color: White/Black
JLECB2GW	40x33x23cm/6pcs 8.6/7.6kgs	Lens: Red/Green, Letter: EXIT/SALIDA
JLECB2RWRC	40x33x23cm/6pcs 9.2/8.2kgs	Remote capability



UL US RoHS COMPLIANT CEC
DOE FC

Features:

- Injection-molded, flame-retardant, high-impact, thermoplastic housing.
- Innovative, easy installation in minutes.
- Letters 6"height with 3/4"stroke.Optional RED or GREEN letters.
- SALIDA faceplate available.
- Single or double face(Universal)
- Universal J-box mounting pattern.
- 120V - 277VAC Universal voltage operation.
- 2X1W SMT LED lamp heads for emergency mode.
- Built-in 3.6V1000mAh Ni-MH battery for minimum 90 minutes emergency operation.
- Built-in 3.6V2000mAh Ni-MH battery for minimum 90 minutes emergency operation. (JLECE2RWRC)
- Maximum 24 hours for full recharge time.
- Test switch and charge indicator.
- UL and cULus listed.
- 0° to 40° C indoor damp location listed.
- Three years warranty.

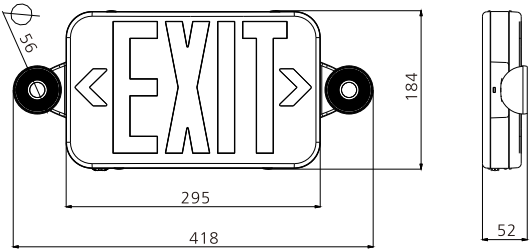


Ordering information

Model No.	Packing information	Options
JLECE2RW	45x41x23cm/6pcs 6. 2/5. 2kgs	Housing Color: White/Black
JLECE2GW	45x41x23cm/6pcs 6. 2/5. 2kgs	Lens: Red/Green, Letter: EXIT/SALIDA
JLECE2RWRC	45x41x23cm/6pcs 8/7kgs	Remote capability



Features:

- Injection molded, flameretardant, highimpact, thermoplastic housing and polycarbonate cover.
- Innovative, easy installation in minutes
- Suitable for wall and ceiling mount applications
- Universal J-box mounting pattern
- 120V/277VAC Dual voltage operation
- 2X12pcs Super bright 2835 0.5W LED lamp heads for emergency mode, provide more than 400Lm output.
- Built-in 3.6V2000mAh Nickel cadmium battery for minimum 90 minutes emergency operation.
- Maximum 24 hours for full recharge time
- Test switch and charge indicator
- UL and cULus Wet location listed
- -20° to 40°C outdoor damp location listed
- Three years warranty.

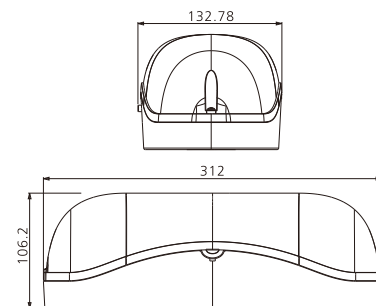


Ordering information

Model No.	Packing information	Options
JLEU5WP	45.5x34.5x28cm/6pcs 4.8/3.8kgs	Housing Color: White/Black/Grey



Features:

- Injection molded, flameretardant, highimpact, thermoplastic housing and polycarbonate cover.
- Innovative, easy installation in minutes
- Letters 6" height with 3/4" stroke. Optional RED or GREEN letters.
- Universal J-box mounting pattern
- 120V/277VAC Dual voltage operation
- Single or double face(Universal).
- Built-in 3.6V500mAh Ni-Mh battery for minimum 90 minutes emergency operation.(JLWPPEEW)
- Built-in 3.6V1200mAh Ni-Mh battery for minimum 90 minutes emergency operation.(JLWPCECW)
- Maximum 24 hours for full recharge time
- Test switch and charge indicator
- UL and cULus Wet location listed
- -20° to 40°C outdoor damp location listed
- Three years warranty.

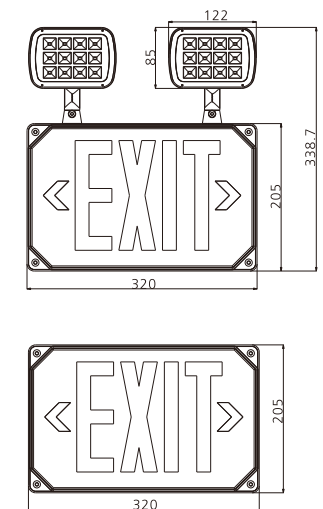

Ordering information


Model No.	Packing information	Options
JLWPPE1RW	44x35x24cm/6pcs 10/9kgs	Lens: Red/Green
JLWPPE1GW	44x35x24cm/6pcs 10/9kgs	Housing Color: White/Black/Grey
JLWPPE2RW	44x35x24cm/6pcs 13/12kgs	
JLWPPE2GW	44x35x24cm/6pcs 13/12kgs	
JLWPCE1RW	44x35x38cm/6pcs 12.4/11.4kgs	
JLWPCE1GW	44x35x38cm/6pcs 12.4/11.4kgs	
JLWPCE2RW	44x35x38cm/6pcs 15.4/14.4kgs	
JLWPCE2GW	44x35x38cm/6pcs 15.4/14.4kgs	



UL US RoHS COMPLIANT CEC
DOE FC

Features:

- Aluminum housing with high grade acrylic panel.
- Innovative, easy installation in minutes.
- Aluminum mounting plate allows top, back or end mount.
- Removable directional indicators.
- 120V/277VAC Dual voltage operation.
- Letter 6" height with 3/4" stroke. Super bright RED or GREEN LED lamps.
- Optional white or silver mylar.
- Built-in 3.6V600mAh Nickel cadmium battery for minimum 90 minutes emergency operation.
- Maximum 24 hours for full recharge time.
- Test switch and charge indicator.
- UL and cULus listed.
- 0° to 40° C indoor damp location listed.
- Three years warranty.

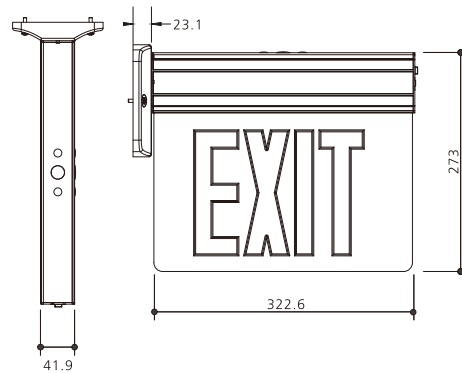

Ordering information


Model No.	Packing information	Options
JELEX1RC	38x37x30.5cm/6pcs 9.8/9.0kgs	Housing Color: White/Black/Aluminum
JELEX1GC	38x37x30.5cm/6pcs 9.8/9.0kgs	Panel: Clear/White/Mirror
JELEX2RM	38x37x30.5cm/6pcs 9.8/9.0kgs	Letter color: RED/GREEN
JELEX2GM	38x37x30.5cm/6pcs 9.8/9.0kgs	
JELEX2RW	38x37x30.5cm/6pcs 9.8/9.0kgs	
JELEX2GW	38x37x30.5cm/6pcs 9.8/9.0kgs	



Features:

- Aluminum housing with high grade acrylic panel.
- Innovative, easy installation in minutes.
- Plastic mounting plate allows top, back or end mount.
- Removable directional indicators.
- SALIDA SIGNS available
- 120V-277VAC Universal voltage operation.
- Super bright RED or GREEN LED lamps.
- Built-in 4.8V500mAh Ni-MH battery for minimum 90 minutes emergency operation.
- Maximum 24 hours for full recharge time.
- Test switch and charge indicator.
- Removable front cover for easy installation and battery aintenance.
- UL and cULus listed.
- 0° to 40° C indoor damp location listed.
- Three years warranty.

UL US RoHS COMPLIANT CEC
DOE FC

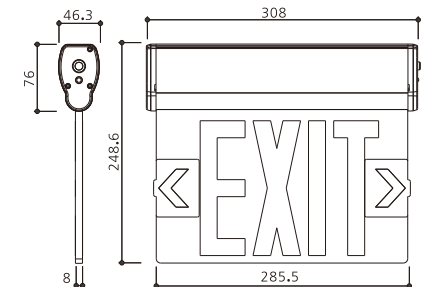


Ordering information

Model No.	Packing information	Options
JELBEX1RC	45x35x25cm/6pcs 9.0/8.0kgs	Housing Color: White/Black/Aluminum
JELBEX1GC	45x35x25cm/6pcs 9.0/8.0kgs	Panel: Clear/White/Mirror
JELBEX1RM	45x35x25cm/6pcs 9.0/8.0kgs	Letter color: RED/GREEN
JELBEX2RM	45x35x25cm/6pcs 9.0/8.0kgs	
JELBEX1GM	45x35x25cm/6pcs 9.0/8.0kgs	
JELBEX2GM	45x35x25cm/6pcs 9.0/8.0kgs	
JELBEX1RW	45x35x25cm/6pcs 9.0/8.0kgs	
JELBEX2RW	45x35x25cm/6pcs 9.0/8.0kgs	
JELBEX1GW	45x35x25cm/6pcs 9.0/8.0kgs	
JELBEX2GW	45x35x25cm/6pcs 9.0/8.0kgs	



Features:

- Injection molded, flameretardant, highimpact, thermoplastic housing and high grade acrylic panel.
- Innovative, easy installation in minutes.
- Plastic mounting plate allows top, back or end mount.
- Removable directional indicators.
- SALIDA SIGNS available
- 120V/277VAC Dual voltage operation.(120/347V dual voltage for Canada available)
- Super bright RED or GREEN LED lamps.
- Built-in 3.6V500mAh Ni-MH battery for minimum 90 minutes emergency operation.
- Maximum 24 hours for full recharge time.
- Test switch and charge indicator.
- Removable front cover for easy installation and battery aintenance.
- UL and cULus listed.
- 0° to 40° C indoor damp location listed.
- Three years warranty.

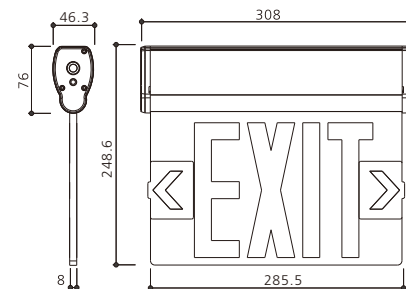


Ordering information

Model No.	Packing information	Options
JELCEX1RC	45x35x25cm/6pcs 8. 0/7. 0kgs	Housing color: White/ Black
JELCEX1GC	45x35x25cm/6pcs 8. 0/7. 0kgs	Letter: EXIT/SALIDA
JELCEX1RM	45x35x25cm/6pcs 8. 0/7. 0kgs	
JELCEX2RM	45x35x25cm/6pcs 8. 0/7. 0kgs	
JELCEX1GM	45x35x25cm/6pcs 8. 0/7. 0kgs	
JELCEX2GM	45x35x25cm/6pcs 8. 0/7. 0kgs	
JELCEX1RW	45x35x25cm/6pcs 8. 0/7. 0kgs	
JELCEX2RW	45x35x25cm/6pcs 8. 0/7. 0kgs	
JELCEX1GW	45x35x25cm/6pcs 8. 0/7. 0kgs	
JELCEX2GW	45x35x25cm/6pcs 8. 0/7. 0kgs	



Features:

- Aluminum housing with high grade acrylic panel.
- Compatible with drywall or drop ceiling mount installations.
- Bar hangers included.
- Optional single/double face, 6" acrylic panels, with Silver or White Mylar
- 8" New York city compliant EXIT letters available(JNYREEL SERIES)
- Removable directional indicators.
- EXIT/SALIDA/RUNNING MAN SIGNS available
- 120V-277VAC Universal voltage operation
- Super bright RED or GREEN LED lamps.
- Built-in 3.6V500mAh Ni-MH battery for minimum 90 minutes emergency operation.
- Maximum 24 hours for full recharge time.
- Test switch and charge indicator.
- Removable front cover for easy installation and battery maintenance.
- UL and cULus listed.
- 0° to 40° C indoor damp location listed.
- Three years warranty.

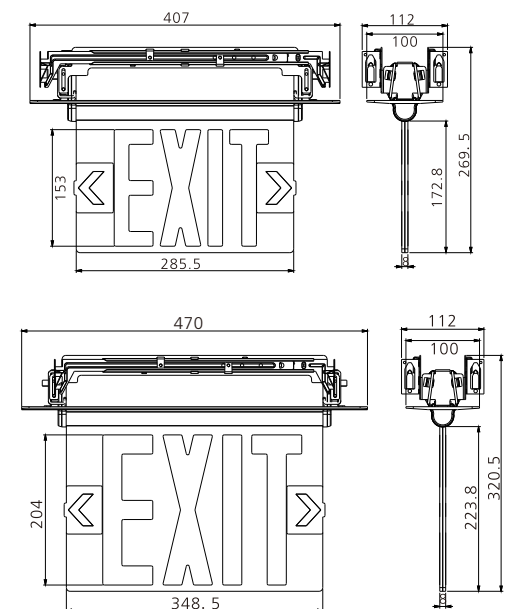


Ordering information

Model	No. of Faces	Letters	Panel	Notes
JREEL	1 Single face	R Red	C Clear	6" Edge-lit
			M Silver	
	2 Double face	G Green	W White	
JNYREEL	1 Single face	R Red	C Clear	8" New York Edge-lit
			M Silver	
	2 Double face	G Green	W White	



Features:

- Injection molded, flameretardant, highimpact, thermoplastic housing and high grade acrylic panel.
- Innovative, easy installation in minutes.
- Plastic mounting plate allows top, back or end mount.
- Removable directional indicators.
- SALIDA SIGNS available
- 120V/277VAC Dual voltage operation.(120/347V dual voltage for Canada available)
- Super bright RED or GREEN LED lamps.
- Built-in 3.6V500mAh Ni-MH battery for minimum 90 minutes emergency operation.
- Maximum 24 hours for full recharge time.
- Test switch and charge indicator.
- Removable front cover for easy installation and battery aintenance.
- UL and cULus listed.
- 0° to 40° C indoor damp location listed.
- Three years warranty.

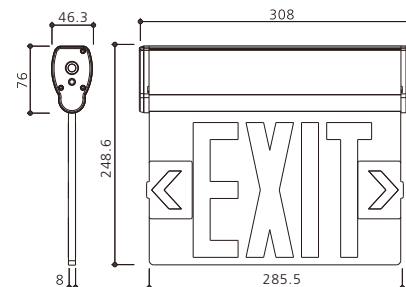


Ordering information

Model No.	Packing information	Options
JELCEX2WC-RM	45x35x25cm/6pcs 8. 0/7. 0kgs	Housing color: White/ Black Letter: EXIT/SALIDA



Features:

- Injection-molded, flame-retardant, high-impact, thermoplastic housing.
- Innovative, easy installation in minutes.
- Easy replacement pictogram design.
- Single or double face.(Universal)
- Universal j-box mounting pattern.
- 120V/347VAC Dual voltage operation.
- 2x1 .2W LED lamp heads(for combo only)
- 2x2.4W LED lamp heads(for combo-HO only)
- Built-in 3.6V Nickel cadmium battery for minimum 90minutes emergency operation.
- cULus listed.
- Three years warranty.
- **With self-diagnostic functions listed,For Monthly self-diagnostic and Annually self-diagnostic.**
- 120V-347VAC Universal voltage operation.
- Built-in 3.6V600mAh Ni-MH Battery for minimun 90 minutes emergency operation.(ZC-JRMEEW)
- Built-in 3.6V2000mAh Ni-MH Battery for minimun 90 minutes emergency operation.(ZC-JRMECWRC Combo and Remote capabilith up to 2W)

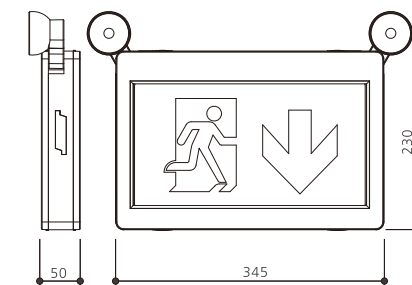


Ordering information

Model No.	Packing information	Options
JRMEEW	41x37x25cm/6pcs 11.5/10.5kgs	Housing Color: White/Black
JRMECW	41x37x25cm/6pcs 12/11kgs	Remote capability
JRMECWRC	41x37x25cm/6pcs 11.5/10.5kgs	
JRMECWHO	41x37x25cm/6pcs 12/11kgs	
JRMECWHORC	41x37x25cm/6pcs 13/12kgs	



Features:

- Aluminum housing with high grade acrylic panel.
- Innovative, easy installation in minutes.
- Plastic mounting plate allows top, back or end mount.
- 120V/347V Dual voltage operation.
- Super bright GREEN LED lamps.
- Built-in 4.8V500mAh Ni-MH battery for minimum 90 minutes emergency operation.
- Maximum 24 hours for full recharge time.
- Test switch and charge indicator.
- Removable front cover for easy installation and battery maintenance.
- CSA listed.
- 0° to 40° C indoor damp location listed.
- Three years warranty.

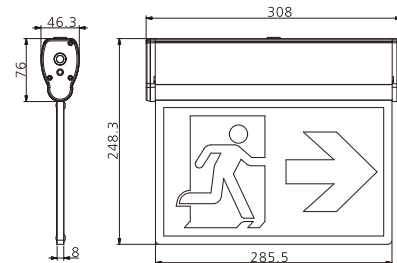



Ordering information

Model No.	Packing information	Options
JELRM	45x35x25cm/6pcs 9.0/8.0kgs	Housing color: White/Aluminum/Black



Features:

- Durable heavy duty steel housing.
- Innovative, easy installation in minutes.
- Universal j-box mounting pattern.
- 120V/347VAc Dual voltage operation
- 2X3W COB ultra bright LED lamp heads for emergency mode. (CALEDCXTEWRW/CALEDLXTEWRW)
- Built-in 4.8V2000mAh Nickel cadmium battery for minimum 90 minutes emergency operation. (CALEDXITWRW)
- Built-in 6V12Ah Lead acid battery for minimum 90 minutes emergency operation. (CALEDLXTEWRW)
- Maximum 24 hours for full recharge time.
- Test switch and charge indicator.
- CSA listed.
- 0° to 40°C indoor damp location listed.
- Three years warranty.

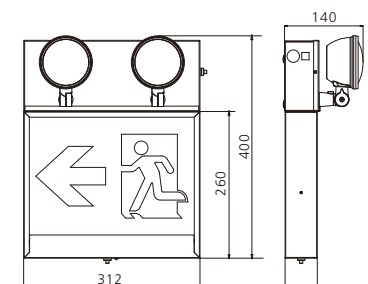

Ordering information

Model No.	Packing information	Options
CALEDXITWRW	38x32x36cm/4pcs 8/6.8kgs	Housing Color: White/Black
CALEDLXTEWRW	35x30x42cm/2pcs 13.6/12.6kgs	




New

UL LISTED FC CEC E

Features:

- Universal 120V-277V voltage, 50/60Hz.
- 3W (2 LEDs x 1.5W) per head with a light output of 400/800 lumens total.
- Built in 9.6V900mAh long life, maintenance free, rechargeable Ni-MH battery
- Built in 9.6V1500mAh long life, maintenance free, rechargeable Ni-MH battery. (HO models only)
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90 minutes emergency illumination.
- Durable, powder-coated 20-gauge steel construction in white or black finish.
- Meets UL924, NFPA101 Life Safety Code, NEC, OSHA, Local and State Codes.
- Meets city of Chicago requirements.
- Certified to CEC under Title 20 Regulations.
- Three years warranty.

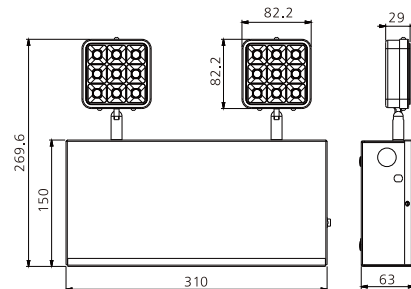

Ordering information


Model No.	Rated Voltage	Input Power	Lumen	Battery	Emergency Run Time	Packing Information
FT-STN1-W	120-277V	4.5W	≥400lm	Ni-MH 9.6V 900mAh	≥90 mins	36x34.5x27.5cm/4pcs 9.2/8.2kgs
FT-STN1-W-HO	120-277V	4.5W	≥800lm	Ni-MH 9.6V 1500mAh	≥90 mins	36x34.5x27.5cm/4pcs 9.4/8.4kgs
FT-STN1-W-RC	120-277V	4.5W	≥400lm	Ni-MH 9.6V 1500mAh	≥90 mins	36x34.5x27.5cm/4pcs 9.4/8.4kgs



UL LISTED FC CEC E


Features:

- Universal 120V-277V voltage, 50/60Hz.
- 2x9pcs ultra bright 5050 SMT LED provide a light output of 400/800 lumens total.
- Built-in long life, maintenance-free, rechargeable Ni-Cad battery (FT-NYEX series)
- Built-in long life, maintenance-free, rechargeable Ni-MH battery (Combo EM models only, FT-NYEC series)
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90 minutes emergency illumination.
- Durable, powder-coated 20-gauge steel construction in white or black finish.
- UL listed for damp locations (0°-40°C).
- Meets UL924, NFPA101 Life Safety Code, NEC, OSHA, Local and State Codes.
- Meets city of New York requirements.
- Certified to CEC under Title 20 Regulations.
- Three years warranty.

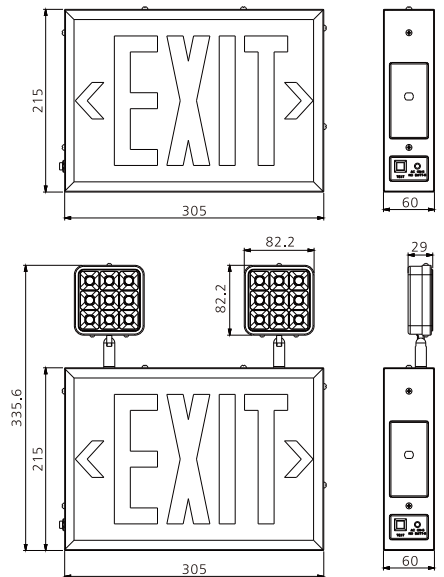

Ordering information

Model No.	Rated Voltage	Input Amps	Input Power	Lumen	Battery	Emergency Run Time	Packing Information
FT-NYAC1-2RW	120-277V	0.038A	2W	/	/	/	47x42.5x34cm/4pcs 17/16kgs
FT-NYEX1-2RW	120-277V	0.052A	3.2W	/	Ni-Cd 3.6V 600mAh	≥90mins	47x42.5x34cm/4pcs 17.5/16.5kgs
FT-NYEC1-2RW	120-277V	0.068A	4.8W	≥400lm	Ni-MH 9.6V 1200mAh	≥90mins	47x43x44.5cm/4pcs 19.8/18.8kgs
FT-NYEC1-2RW-RC	120-277V	0.068A	4.8W	≥400lm	Ni-MH 9.6V 2000mAh	≥90mins	47x43x44.5cm/4pcs 20/19kgs
FT-NYEC1-2RW-HO	120-277V	0.068A	4.8W	≥800lm	Ni-MH 9.6V 2000mAh	≥90mins	47x43x44.5cm/4pcs 20/19kgs

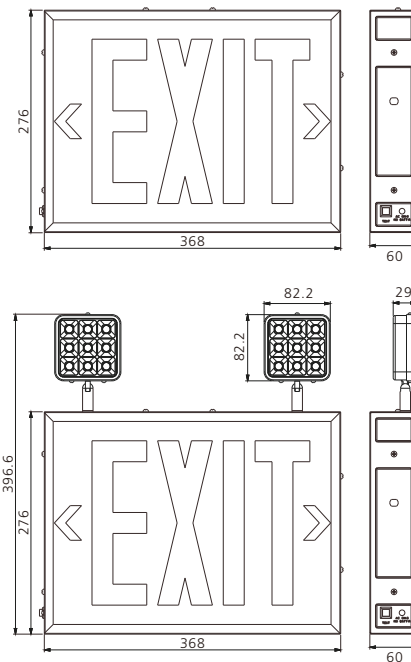

Features:

- Universal 120V-277V voltage, 50/60Hz.
- 2x9pcs ultra bright 5050 SMTLED provide a light output of 400/800 lumens total.
- Built-in long life, maintenance-free, rechargeable Ni-Cad battery (FT-CHEX series)
- Built-in long life, maintenance-free, rechargeable Ni-MH battery. (Combo EM models only, FT-CHEC series.)
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90 minutes emergency illumination.
- Durable, powder-coated 20-gauge steel construction in white or black finish.
- UL listed for damp locations. (0°-40°C)
- Meets UL924, NFPA101 Life Safety Code, NEC, OSHA, Local and State Codes.
- Meets city of Chicago requirements.
- Three years warranty.


Ordering information

Model No.	Rated Voltage	Input Amps	Input Power	Lumen	Battery	Emergency Run Time	Packing Information
FT-CHAC1-2RW	120-277V	0.038A	2W	/	/	/	46.5x37x29cm/4pcs 11.5/10.5kgs
FT-CHEX1-2RW	120-277V	0.052A	3.2W	/	Ni-Cd 3.6V 600mAh	≥90 mins	46.5x37x29cm/4pcs 12/11kgs
FT-CHEC1-2RW	120-277V	0.068A	4.8W	≥400lm	Ni-MH 9.6V 1200mAh	≥90 mins	47x37.5x39.5cm/4pcs 14.2/13.2kgs
FT-CHEC1-2RW-RC	120-277V	0.068A	4.8W	≥400lm	Ni-MH 9.6V 2000mAh	≥90 mins	47x37.5x39.5cm/4pcs 14.5/13.5kgs
FT-CHEC1-2RW-HO	120-277V	0.068A	4.8W	≥800lm	Ni-MH 9.6V 2000mAh	≥90 mins	47x37.5x39.5cm/4pcs 14.5/13.5kgs



Features:

- Durable heavy duty steel housing
- Innovative, easy installation in minutes.
- 120-277VAC Universal voltage operation.
- Built-in Nickel cadmium battery for minimum 90 minutes emergency operation.
- Working voltage 3-60VDC
- Supplies 4W/8W constant power output for use with most LED loads.
- Maximum 24 hours for full recharge time.
- Test switch and charge indicator.
- UL and cULus listed.
- 0° to 50°C indoor damp location listed.
- Three years warranty.

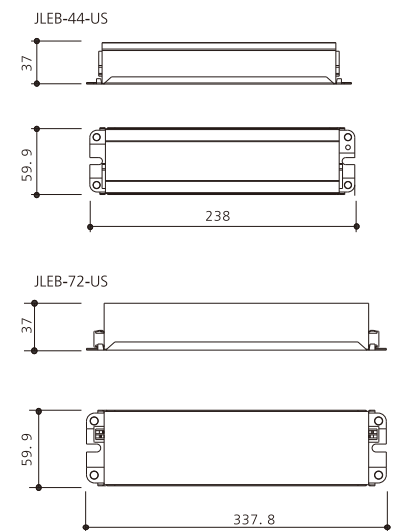

Ordering information


Model No.	Packing information	Options
JLEB-44-US	29.5x28x19cm/6pcs 5.6/4.6kgs	Housing color: White/Red
JLEB-72-US	39.5x28x19cm/6pcs 8.5/7.5kgs	
JLEB-44-US-C	49.5x28x19cm/6pcs 7.9/6.9kgs	Flex conduits
JLEB-72-US-C	49.5x28x19cm/6pcs 10.1/9.1kgs	Flex conduits



UL US RoHS COMPLIANT CEC
DOE FC

Features:

- Durable heavy duty steel housing
- Innovative, easy installation in minutes.
- 120-277VAC Universal voltage operation.
- Built-in Nickel cadmium battery for minimum 90 minutes emergency operation.
- Working voltage 300VDC(OR 220VAC)
- Suitable with LED fixtures up to 10W/20W(for internal driver only) and provide 100% lumen output.
- Maximum 24 hours for full recharge time.
- Test switch and charge indicator.
- UL and cULus listed.
- 0° to 40°C indoor damp location listed.
- Three years warranty.

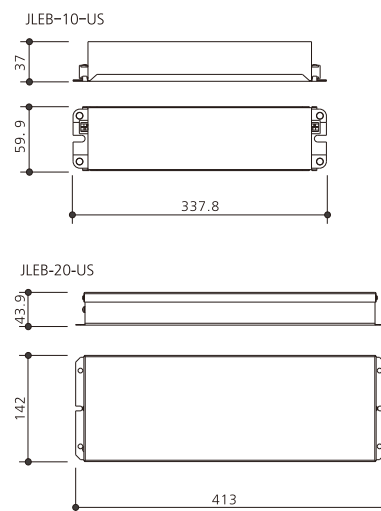

Ordering information


Model No.	Packing information	Options
JLEB-10-US	40x25x16.5cm/6pcs 9/8kgs	Housing color: White/Red
JLEB-20-US	55x39.5x18.5cm/6pcs 20.8/19.8kgs	Flex conduits



UL US RoHS COMPLIANT CEC
DOE FC

Features:

- Durable heavy duty steel housing
- Innovative, easy installation in minutes
- 120-277VAC Universal voltage operation
- Built-in Nickel cadmium battery for minimum 90 minutes emergency operation.
- Working voltage 180VDC(OR 120VAC)
- Suitable with LED fixtures up to 20W(for internal driver only) and provide 100% lumen output.
- Maximum 24 hours for full recharge time
- Test switch and charge indicator
- UL and cULus listed
- 0° to 40°C indoor damp location listed
- Three years warranty.



Ordering information

Model No.	Packing information	Options
JLEB-20B-US	46.5x32x26.5cm/6pcs 12.7/11.7kgs	











Features:

- Durable heavy duty steel housing
- Innovative, easy installation in minutes
- 120-277VAC universal voltage operation
- Built-in Nickel cadmium battery for minimum 90 minutes emergency operation.
- Working voltage 20-60VDC
- Supplies 12/16/20W constant power output for use with most LED loads.
- Maximum 24 hours for full recharge time
- Test switch and charge indicator
- 0° to 40°C indoor damp location listed
- Three years warranty.

JLEB-12L-US

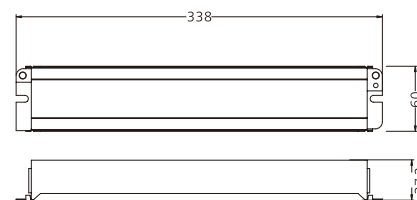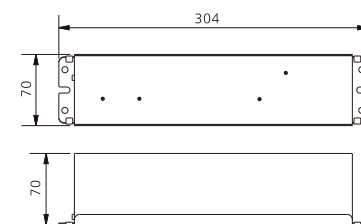JLEB-16L-US
JLEB-20L-US

Ordering information

Model No.	Packing information	Options
JLEB-12L-US	51.5×29×20.5cm/6pcs 8.8/7.8kgs	
JLEB-16L-US	46.5×32×26.5cm/6pcs 11.8/10.8kgs	
JLEB-20L-US	46.5×32×26.5cm/6pcs 12.7/11.7kgs	



JRHWP-2

JRHWP-1



JLRHWP-2



JLRHWP-1



JLRH-1



JLRH-2







Features:

- Injection-molded, flameretardant, highimpact, thermoplastic housing.
- 120/277AC Dual voltage operation.
- 6V/12V, 5.4W/7.2W/9W Incandescent lamps available for JRH series
- 3.6V/9.6V, 1.2W ultra bright white LED lamps available for JLEH series
- Three years warranty.

Ordering information

Model No.	Packing information	Options
JRHWP-1	50.5x35x46/12pcs 6.9/5.9kgs	Housing Color: White/Black
JRHWP-2	57x40x40cm/12pcs 10.8/9.8kgs	Lamps: 6V5.4W/6V9W/12V9W
JLRH-1	48x14x28.5cm/12pcs 4/3kgs	
JLRH-2	48.5x28x25.5cm/12pcs 5.5/4.5kgs	
JLRHWP-1	37x26x36cm/12pcs 4/3kgs	
JLRHWP-2	58x26x47cm/12pcs 5.5/4.5kgs	




Features:

- Injection-molded, flameretardant, highimpact, thermoplastic housing.
- Fully adjustable single or double heads.
- 4x3030 SMD LED's each head.
- Luminous Flux: more than 110Lm(each head)
- 6-24V universal input voltages for remote options.
- Suitable for Damp location.
- UL and cULus listed.

Ordering information

Model No.	Packing information	Options
CNDRH1	40.8x28.4x27.4cm/12pcs 3.2/2.2kgs	Housing color:White/Black
CNDRH2	40.8x29.2x27.4cm/12pcs 4/3kgs	

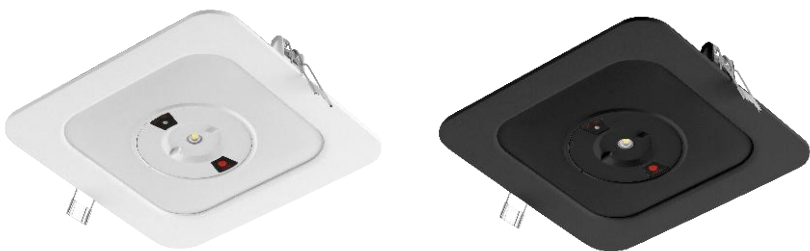


Embedded Mounting Kit





Brand new plastic housing LED emergency down light.
Surface mounted,Embedded mounted.
The light is equipped with 1pcs 3535LED lights.
Ambient temp 5-40°C.
Two years warranty.
Interchangeable installation method.
Comes with replaceable lenses, and you can choose between circular light or polarized light.
With self-diagnostic functions listed (ZCDLB300 UL,ZCDLB150 UL),For Monthly self-diagnostic and Annually self-diagnostic.

Model No.	DLB300 UL	DLB150 UL
Mode of operation	Maintained and Non-Maintained	Maintained and Non-Maintained
Supply Voltage	AC 100-277V 50/60HZ	AC 100-277V 50/60HZ
Input Power	AC: 5.0W / DC: 2.0W	AC: 4.0W / DC: 1.2W
Output Voltage	3.2VDC	3.2VDC
Output Power	3W	1.5W
Lumen Output	AC Max: 200LM/DC Max: 300LM	Max: 150LM
Colour Temperature	6000-6500K	6000-6500K
Battery	LiFePO4 3.2V4000mAh	LiFePO4 3.2V2000mAh
Max Charge Current (mA)	300mA	200mA
Max Discharge Current (mA)	950mA	450mA
Charging Time	24H	24H
Discharge Time	3H	3H
LED	SMD3535 1PCS	SMD3535 1PCS
IP Rating	IP65	IP65
Certification	UL	UL
Packing Detail	42x31x27.5cm/24pcs	42x31x27.5cm/24pcs

Dimension:

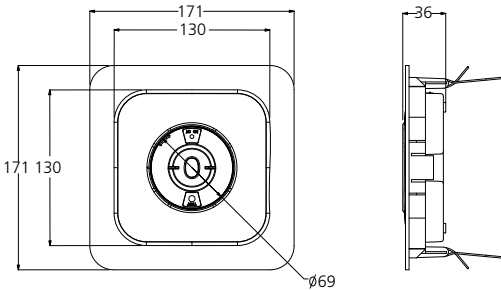


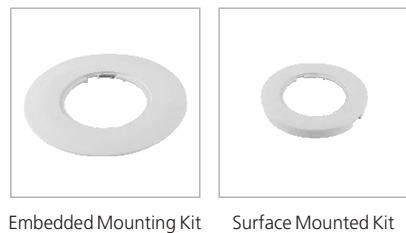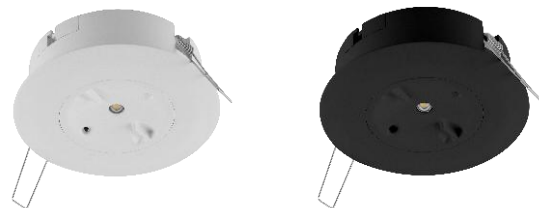

Brand new plastic housing LED emergency down light.
Surface mounted, Embedded mounted.
The light is equipped with 1pcs 3535LED and 3030LED lights.
Ambient temp 5-40°C.
Two years warranty.
Interchangeable installation method.
Comes with replaceable lenses, and you can choose between circular light or polarized light.
With self-diagnostic functions listed (ZCDLB300 UL,ZCDLB150 UL),For Monthly self-diagnostic and Annually self-diagnostic.

Model No.	DLC300 UL	DLC150 UL
Mode of operation	Maintained and Non-Maintained	Maintained and Non-Maintained
Supply Voltage	AC100-277V 50/60HZ	AC100-277V 50/60HZ
Input Power	AC: 5.0W / DC: 2.0W	AC: 4.0W / DC: 1.2W
Output Voltage	3.2VDC	3.2VDC
Output Power	3W	1.5W
Lumen Output	AC:MAX.200LM/DC:MAX.300LM	MAX.150LM
Colour Temperature	6000-6500K	6000-6500K
Battery	LiFePO4 3.2V4000mAh	LiFePO4 3.2V2000mAh
Max Charge Current (mA)	300mA	200mA
Max Discharge Current (mA)	950mA	500mA
Charging Time	24H	24H
Discharge Time	3H	3H
LED	SMD3535 1PCS	SMD3030 1PCS
IP Rating	IP20	IP20
Certification	UL	UL
Packing Detail	42x31x27.5cm/24pcs	42x31x27.5cm/24pcs

Dimension:

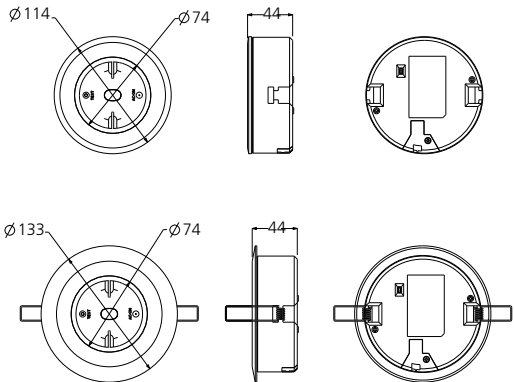

New York Approved Emergency Combo



Bi-Color Emergency Exit Sign And Combo



New York Approved Emergency Lighting Unit



New York Approved Emergency Exit Sign



Incandescent Wet Location Combo
Model JWPECW



Incandescent Emergency Combo
Model JEC2RW/JEC2GW



LED Wet Location Exit sign
Model JWPEEW



MR-16 Halogen Lamp Emergency Light
Model JEU2



Incandescent Emergency Lighting unit
Model JEU1



Incandescent Heavy Duty Emergency lighting unit
Model JEU6



Fixed head Incandescent Emergency Lighting unit
Model JEU4



Dual Head Emergency Light
Model JLEU19



Incandescent Wet Location Emergency Lighting unit
Model JEU8WP



High Output Dual Head Emergency Light
Model R-16L



High Output Dual Head Emergency Light
Model RMR-16L